(19) World Intellectual Property **Organization**

International Bureau



(43) International Publication Date 7 July 2005 (07.07.2005)

PCT

(10) International Publication Number WO 2005/061818 A1

E04G 21/32, (51) International Patent Classification⁷: A62B 1/04, 35/04

(21) International Application Number:

PCT/NL2004/000894

(22) International Filing Date:

21 December 2004 (21.12.2004)

(25) Filing Language:

Dutch

(26) Publication Language:

English

(30) Priority Data:

1025127 24 December 2003 (24.12.2003) NL1025821 NL26 March 2004 (26.03.2004)


- (71) Applicant (for all designated States except US): KEDGE **HOLDING B.V.** [NL/NL]; Stephensonweg 2, NL-4207 HB Gorinchem (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): MASTENBROEK, Martin [NL/NL]; Meentweg 49, NL-1406 KD Bussum

(NL). VAN DER MARK, Hendrik Johannes [NL/NL]; Kerkedijk 51, NL-1862 BE Bergen (NL).

- (74) Agent: JILDERDA, Anne Ayolt; Octrooibureau Lioc B.V., Maliebaan 46, P.O. Box 13363, NL-3507 LJ Utrecht (NL).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SAFETY DEVICE FOR A FALL RESTRAINT

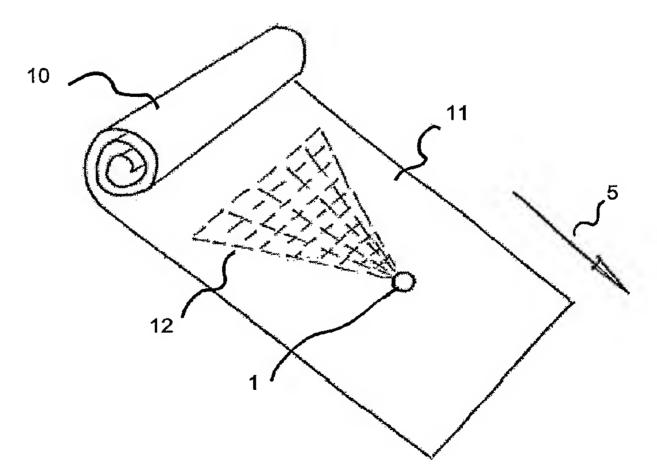

(57) Abstract: A safety device for a fall restraint comprises an anchoring member (1) to which the fall restraint can be coupled directly or indirectly, and fastening means for a firm and durable connection to an object (13). The fastening means are formed by a flexible fastening flap (11) which is intended and adapted to bring about said firm and durable connection to the object. Extending from the fastening flap (11) is a fastening net (12) via which the anchoring member (1) is connected to the flexible fastening flap (11).



WO 2005/061818 A1



Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.